


TT^EEnd System Space 3U cPCI

TTEthernet[®] interface card with three Ethernet ports for use in

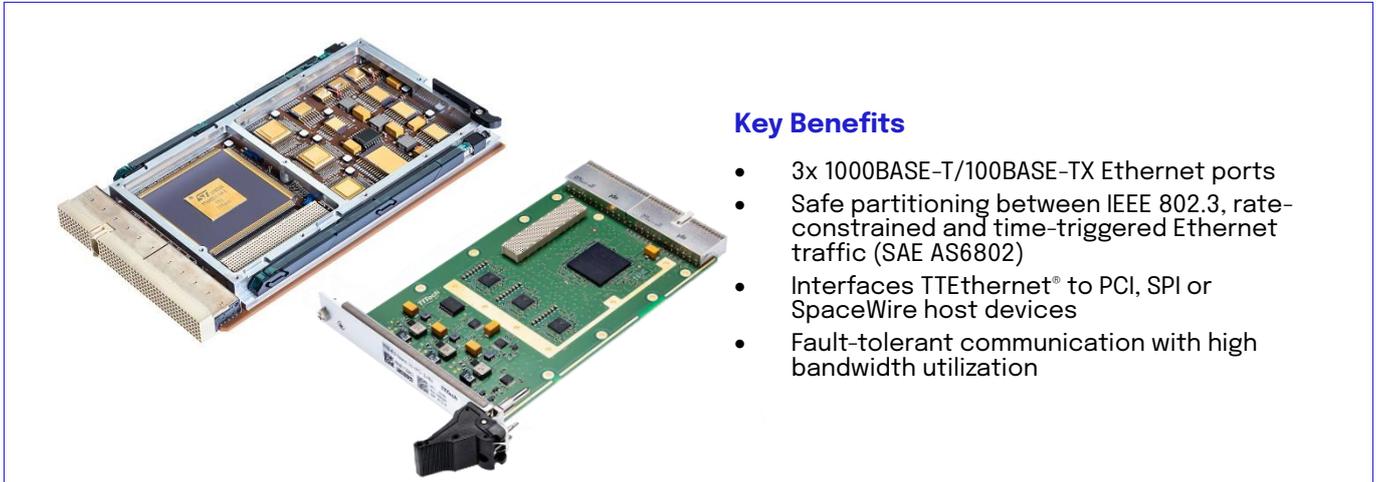

Key Benefits

- 3x 1000BASE-T/100BASE-TX Ethernet ports
- Safe partitioning between IEEE 802.3, rate-constrained and time-triggered Ethernet traffic (SAE AS6802)
- Interfaces TTEthernet[®] to PCI, SPI or SpaceWire host devices
- Fault-tolerant communication with high bandwidth utilization

The TT^EEnd System Space 3U cPCI connects spacecraft subsystems to the TTEthernet[®] network and was specifically designed to meet the challenges of harsh space environments.

The TT^EEnd System Space 3U cPCI interface card connects user data processing hardware to the TTEthernet[®] network. The card is built in a compact cPCI 3U form factor as an off-the-shelf product. TTEthernet[®] permits the use of synchronized and non-synchronized functions of distributed systems in the same Ethernet network. System-critical real-time functions enjoy reserved bandwidth, full determinism and a jitter below 1 μ s. The network can transfer high data rates of non-critical data at the same time - with no impact on critical traffic. This is achieved by a combination of SAE AS6802 time-triggered, rate-constrained and IEEE 802.3 Ethernet. The end system has an internal frame memory of 512 kb to buffer traffic.

Innovation meets heritage

Based on TTTech's core technology, this product is manufactured and qualified by Beyond Gravity, leveraging on an extensive heritage of successful space products.

Host interfaces

The following host interfaces are supported:

- PCI 32 Bit V2.1 33 MHz
- SPI/QSPI up to 250 Mbit/s
- SpaceWire RMAP 100 MHz

A UART/DSU interface is available for debugging and on-ground configuration.

Built for modular cPCI architectures

The TT^EEnd System Space 3U cPCI was designed for maximum ease of use and reduced development cost. In the development phase, it can be placed in an off-the-shelf cPCI rack, enabling access to all interfaces via a rear-I/O break-out board. The PCI slave interface can be accessed as specified in the cPCI standard at the connector J1. The power supply is set up according to PICMG 2.0 R3. The other host interfaces and Ethernet signals are provided at the cPCI J2 Connector and can be routed through a customized backplane for each specific use case.

Redundancy

The TT^EEnd System Space 3U cPCI supports single to triple channel multi-hop Ethernet networks with system synchronization, redundancy management, fault tolerance, fault isolation and recovery capability. TTEthernet[®] is specifically designed for active-active redundant systems and the handling of redundant frames (e.g. first valid frame, or triple-voting via host software) can be configured for each device. The TT^EEnd System Space 3U cPCI supports up to 256 "send" and up to 512 "receive" virtual links which can be separated into eight dedicated memory areas.



Application fields

- Human Spaceflight
- Reconnaissance
- Space Transportation
- Space Robotics

Device and network management

The TTTEnd System Space 3U cPCI provides an integrated LEON2 management CPU to perform diagnostic services. These internal monitoring functions allow the user to continuously assess the system health and the status of the network. Monitored parameters include synchronization state, supply voltage, board temperatures, dropped/rejected frames and built-in self-test results.

TTTEnd Driver

Contact TTTEch for porting and qualification options.

Product Variants

EDU: Functionally-representative with commercial parts for laboratory use only.
PROTO: Built for unit-level qual. (lower parts grade).
FLIGHT: Qualified according to ECSS and acceptance-

tested. Flight-grade model for safety-critical space applications. Built with level-1 grade ceramic parts.

Applicable documents

- PICMG 2.0 R3** - compact PCI® specification
- S-311-P-822** - NASA specification, connectors, PWB, 2 mm cPCI™ Style
- ECSS-Q-ST-60C Rev.2** - ECSS, Electrical, electronic and electromechanical (EEE) components
- ECSS-Q-ST-70** - ECSS, Qualification of PCBs
- ECSS-E-ST-40C** - ECSS, Software
- ECSS-E-ST-10-03C** - ECSS, Testing
- ECSS-Q-ST-30C Rev.1** - ECSS, Dependability

Related products

- TTTEndRearIO 3U cPCI (EDU)
- TTTEndSwitch Space 3U cPCI
- TTTEndTools

13266 & 14515 - TTTEnd System Space 3U cPCI (FLIGHT)	Connectors	cPCI Connector J1	cPCI Connector J2
		<ul style="list-style-type: none"> • Supply voltage (+3.3 V) • PCI bus 	<ul style="list-style-type: none"> • 3x 1000BASE-T/100BASE-TX (magnetics not on FLIGHT/PROTO; EDU magnetics are placed on RearIO) • SpaceWire, QSPI • UART/DSU I/F for laboratory use
	Lifetime	15 years	
	Environmental	<p>Vibration (random, all axes, qualification test levels): 20 - 60 Hz: +3 db/oct, 60-1,000 Hz: 0.273 g²/Hz, 1,000-2,000 Hz: -6 db/oct</p> <p>Shock, all axes (qualification test levels): 20 Hz: 20 g, 1,000 Hz: 2,000 g, 2,000 Hz: 3,000 g, 10,000 Hz: 3,000 g</p> <p>Qualification temperature range: Operational range: -35 °C to +75 °C</p> <p>Radiation: TID for 15 years cis-lunar environment, all components SEL free up to 60 MeV/cm²/mg & SEE tested up to 60 MeV/cm²/mg</p> <p>EMC: Acc. to PICMG 2.0 R3</p>	
	Power supply	Supply voltage: 3.3 V (according to PICMG 2.0 R3), power consumption: < 6 W	
	Dimensions	3U cPCI form factor (PICMG 2.0 R3), conduction-cooled (ANSI/VITA 30.1-2008)	
	Mass	400 g	

Ordering Codes

14033 & 14364 (with wedgelocks)	TTTEnd System Space 3U cPCI (EDU)	Comm. cPCI conn. for 3U cPCI chassis
13586	TTTEnd System Space 3U cPCI (EDU) - H	Flight-compatible cPCI conn. (Hypertac)
13550	TTTEnd System Space 3U cPCI (PROTO)	
13266	TTTEnd System Space 3U cPCI (FLIGHT)	



Experience more → ttech.com/aerospace
products@ttech.com

